


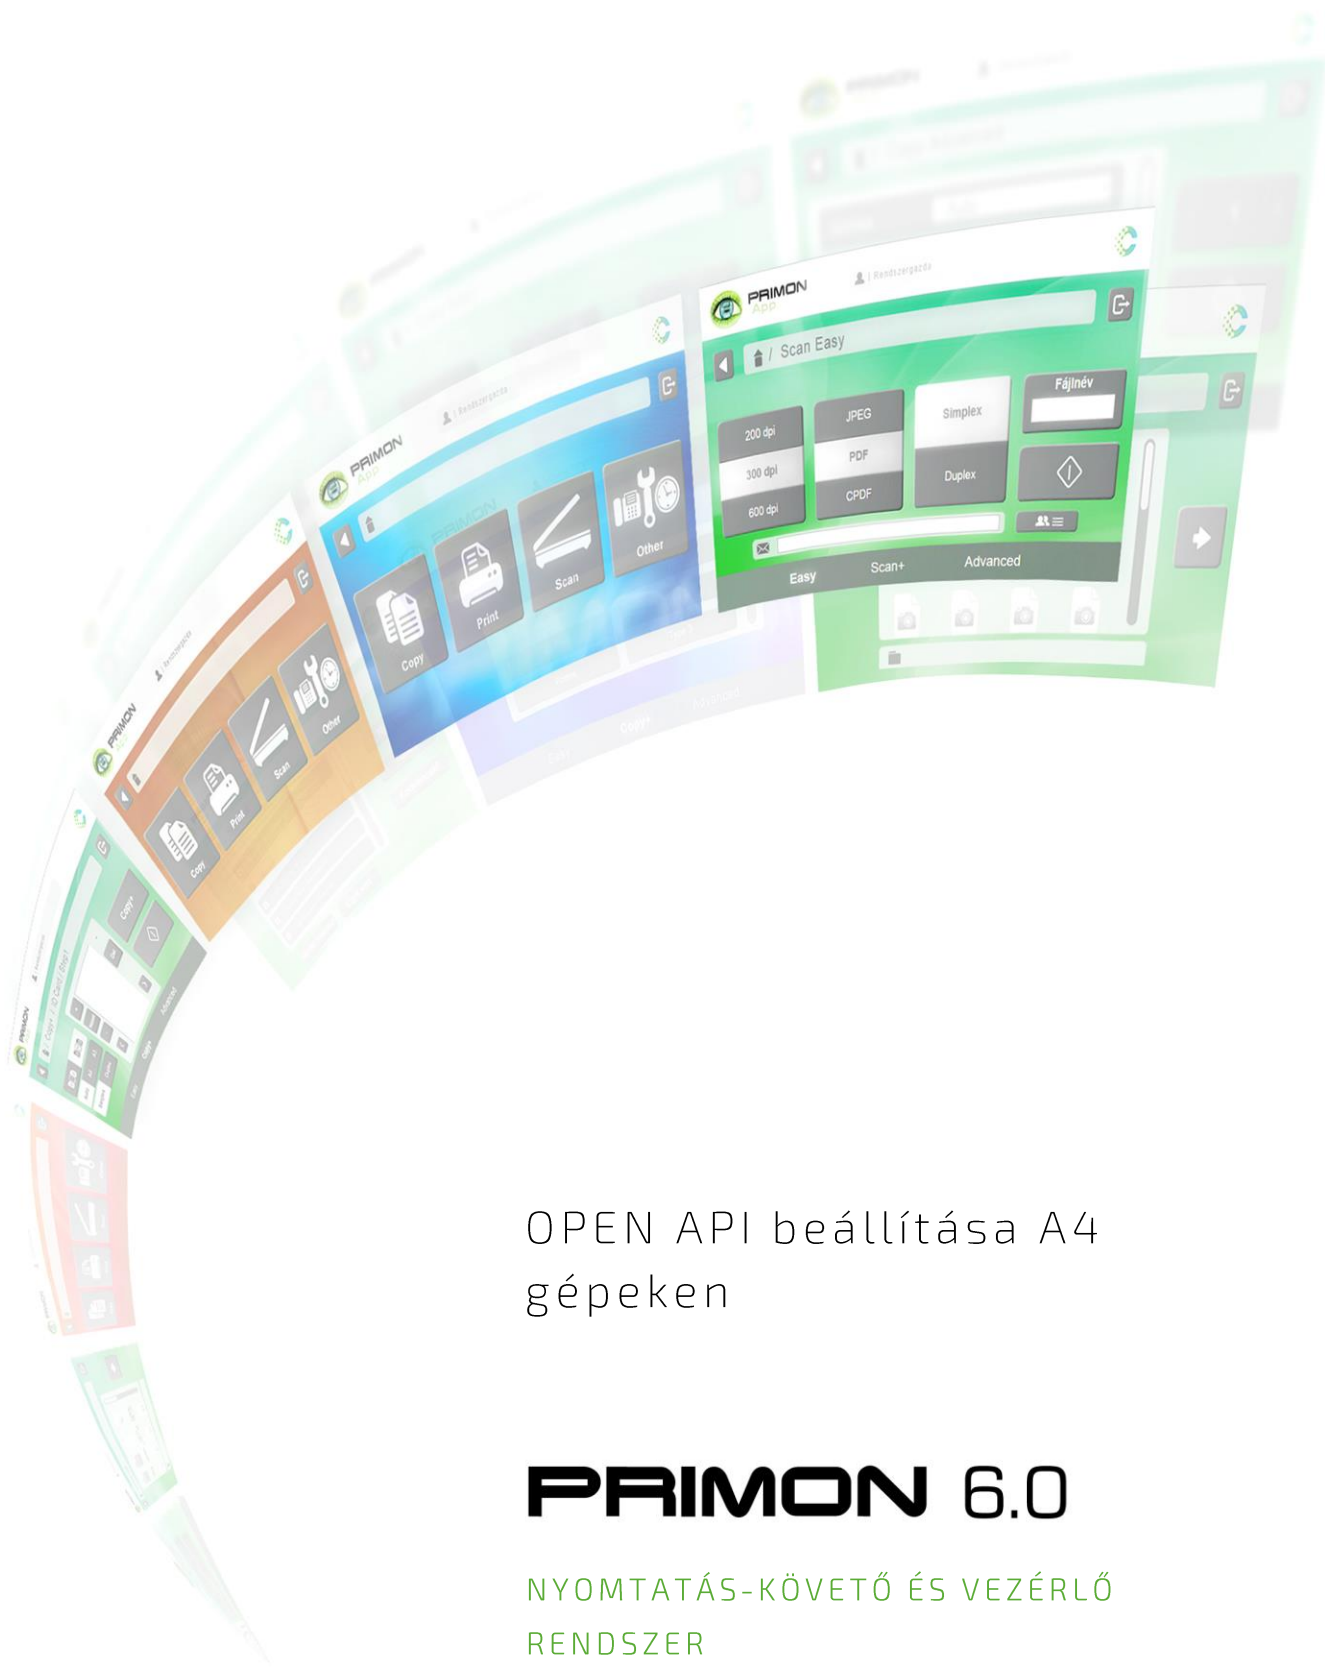

OPEN API beállítása A4
gépeken

PRIMON 6.0

NYOMTATÁS-KÖVETŐ ÉS VEZÉRLŐ
RENDSZER

OPENAPI SSL BEÁLLÍTÁSA A4 GÉPEKEN

1. Administratorként belépni az eszköz web oldalára majd a menüben kiválasztani Security->PKI Settings->Device Certificate->New Registration

The screenshot shows the Konica Minolta Web Connection interface. The top bar includes the Konica Minolta logo, 'Web Connection' text, and 'Model Name: bizhub 4050'. The user is logged in as 'Administrator'. The left sidebar contains a menu with 'PKI Settings' expanded, showing 'Device Certificate' as the selected option. The main content area displays the 'Device Certificate' settings, including a 'New Registration' button and a table with columns: Default, Issued By, Issued To, Expiration Date, Detail, and Edit.

2. Mezőket értelem szerűen kitölteni, majd Apply

The screenshot shows the 'Create a Self-signed Certificate' form in the Konica Minolta Web Connection interface. The form includes fields for Common Name (BH4050-89BADB), Organization, Organization Unit, Locality, State/Province, Country, Administrator E-mail Address, Validity Start Date (13/01/2016), and Validity Period (1 days (1-3650)). The 'Apply' button is highlighted.

3. Ha mindent jól csináltunk, a gépen lesz egy Certificate

KONICA MINOLTA
PAGE SCOPE Web Connection
Model Name: bizhub 4050

Administrator
Ready
Not Supported USB Device

Log out

System Security Job Print Storage Address Network

Authentication
ID & Print Settings
Authentication Device Settings
PKI Settings
Device Certificate
SSL/TLS Settings
Protocol Settings
External Certificate
Validate Certificate

Device Certificate
New Registration

Default	Issued By	Issued To	Expiration Date	Detail	Edit
☒	BH4050-89BADB	BH4050-89BADB	07/11/2025	Detail	Edit

Apply Clear

4. Ezután SSL/TLS Settings->Enable, és az Encryption Strenght értéket is be kell állítani a képen láthatóra

KONICA MINOLTA
PAGE SCOPE Web Connection
Model Name: bizhub 4050

Administrator
Ready
Not Supported USB Device

Log out

System Security Job Print Storage Address Network

Authentication
ID & Print Settings
Authentication Device Settings
PKI Settings
Device Certificate
SSL/TLS Settings
Protocol Settings
External Certificate
Validate Certificate

SSL/TLS Settings

SSL/TLS Enable

Encryption Strength AES-256, 3DES, RC4-128

SSL/TLS Version

☒ SSL 3.0
☒ TLS 1.0
☒ TLS 1.1
☒ TLS 1.2

Apply Clear

5. Ezután Network Settings->TCP Socket Settings->SSL/TLS->SSL Only

KONICA MINOLTA
PAGE SCOPE Web Connection
Model Name: bizhub 4050

Administrator
Ready
Not Supported USB Device

Log out

System Security Job Print Storage Address Network

General Settings
TCP/IP Settings
E-mail Settings
LDAP Settings
HTTP Settings
IPP Settings
FTP Settings
SNMP Settings
SMB Settings
Web Service Settings
Bonjour Settings
Network Fax Settings
WebDAV Settings
OpenAPI Settings
TCP Socket Settings

TCP Socket Settings

TCP Socket Enable

Port Number 59158 (1-65535)

SSL/TLS SSL Only

Port Number (SSL/TLS) 59159 (1-65535)

Apply Clear

6. HTTP Settings->http Server Settings->SSL/TLS->Enable

KONICA MINOLTA
PAGE SCOPE Web Connection
Model Name: bizhub 4050

Administrator
Ready
Not Supported USB Device

Log out

System Security Job Print Storage Address Network

General Settings
TCP/IP Settings
E-mail Settings
LDAP Settings
HTTP Settings
IPP Settings

HTTP Server Settings

HTTP Server Enable

Port Number 80 (1-65535)

SSL/TLS Enable

Port Number (SSL) 443 (1-65535)

Apply Clear

7. Ezután WebDAV Settings->WebDAV Server Settings->SSL/TLS->SSL/Non-SSL

SCOPE vweb Connection
Model Name: bizhub 4050
Ready
Not Supported USB Device

System Security Job Print Storage Address Network

General Settings
TCP/IP Settings
E-mail Settings
LDAP Settings
HTTP Settings
IPP Settings
FTP Settings
SNMP Settings
SMB Settings
Web Service Settings
Bonjour Settings
Network Fax Settings
WebDAV Settings
WebDAV Server Settings
WebDAV Client Settings

WebDAV Server Settings

WebDAV Server Enable

SSL/TLS SSL/Non-SSL

Access Rights Settings

Password ☐ Change Password

Initial Password

Apply Clear

8. Ezután OpenAPI

KONICA MINOLTA
PAGE SCOPE Web Connection
Model Name: bizhub 4050

Administrator
Ready
Not Supported USB Device

Log out

System Security Job **Print** Storage Address Network

General Settings
TCP/IP Settings
E-mail Settings
LDAP Settings
HTTP Settings
IPP Settings
FTP Settings
SNMP Settings
SMB Settings
Web Service Settings
Bonjour Settings
Network Fax Settings
WebDAV Settings
▼ OpenAPI Settings
▶ OpenAPI Settings

OpenAPI Settings

All OpenAPI application will be deleted if you change OpenAPI External setting into Disable.

OpenAPI Enable
OpenAPI External Enable
Port Number 50001 (1-65535)
SSL/TLS SSL Only
Port Number (SSL/TLS) 50003 (1-65535)
Authentication Off
Login Name
Password ☐ Change Password
Proxy
Proxy Server Address 0.0.0.0
Proxy Server Port Number(HTTP) 8080 (1-65535)
Proxy Server Port Number(HTTPS) 8080 (1-65535)

Kész!

Lehet OpenAPI-t telepíteni a gépre.



COLORSPECTRUM KFT

1131 Budapest, Dolmány u. 26.

Tel.: +36 1 303-9009

Fax: +36 1 210-1482

E-mail: info@printmonitoring.com

www.printmonitoring.com