



Tanúsítvány beállítása az
IWS-hez

PRIMON 6.0

NYOMTATÁS-KÖVETŐ ÉS VEZÉRLŐ
RENDSZER

TANÚSÍTVÁNY BEÁLLÍTÁSA AZ IWS-HEZ

Az MFP weboldalára jelentkezünk be Adminisztrátori módba. Majd lépünk be a Security menübe.

 **KONICA MINOLTA**

 **Web Connection**

Model Name: bizhub 227

 Administrator

Logout



 Ready to Scan

 Ready to Print





Maintenance

System Settings

Security

User Auth/Account Track

Network

Box

Print Setting

Store Address

Wizard

Customize

 To Main Menu

▼ PKI Settings

▶ Device Certificate Setting

▶ SSL Setting

▶ Protocol Setting

▶ External Certificate Setting

▶ Certificate Verification Settings

▶ Address Reference Setting

▶ Restrict User Access

▶ Auto Logout

▶ Administrator Password Setting

▶ TX Operation Log Setting

▶ Quick Security Setting

Device Certificate List

New Registration

Default	Issuer	Subject	Validity Period	Detail	Setting
☒	KM9BE1F3.primon2....	KM9BE1F3.primon2....	01/09/2025	Detail	Setting

OK Cancel

A Security menüpontban, ha van tanúsítvány, töröljük, majd adjunk hozzá az újat az alábbi képen látható paraméterekkel. Az Encryption Key Type leugró menüben pedig válasszuk az RSA-1024_SHA-256 opciót. Az A4-es gépeken kötelező minden lehetőséget kitölteni, ezért tegyünk így az A3-as gépeknél is.

KONICA MINOLTA

Administrator Logout ?

Web Connection
Model Name: bizhub 227

Ready to Scan
Ready to Print

Maintenance System Settings **Security** User Auth/Account Track Network Box

Print Setting Store Address Wizard Customize To Main Menu

▼ PKI Settings

- ▶ Device Certificate Setting
- ▶ SSL Setting
- ▶ Protocol Setting
- ▶ External Certificate Setting
- ▶ Certificate Verification Settings
- ▶ Address Reference Setting
- ▶ Restrict User Access
- ▶ Auto Logout
- ▶ Administrator Password Setting
- ▶ TX Operation Log Setting
- ▶ Security Details
- ▶ Quick Security Setting


Create and install a self-signed Certificate.

Common Name	KM9BE1F3.primon2.local
Organization	Colorspectrum
Organizational Unit	Colorspectrum
Locality	Hungary
State/Province	Hungary
Country	HU
Admin. E-mail Address	info@colorspectrum.hu
Validity Start Date	14/05/2018 10:51:28
Validity Period	3650 Day(s)(1-3650)
Encryption Key Type	RSA-1024_SHA-256


OK Cancel

*FONTOS: A Bizhub 4050-es gépeknél be kell állítani egy dip SW-et még a tanúsítvány beállítások előtt, különben nem jelenik meg az Encryption Key Type beállítás az eszköz weblapján.

*Ehhez előbb lépünk be a Bizhub 4050-es szerviz menüjébe. Válasszuk a System 2 menüpontot, majd a Software Switch beállításokat.

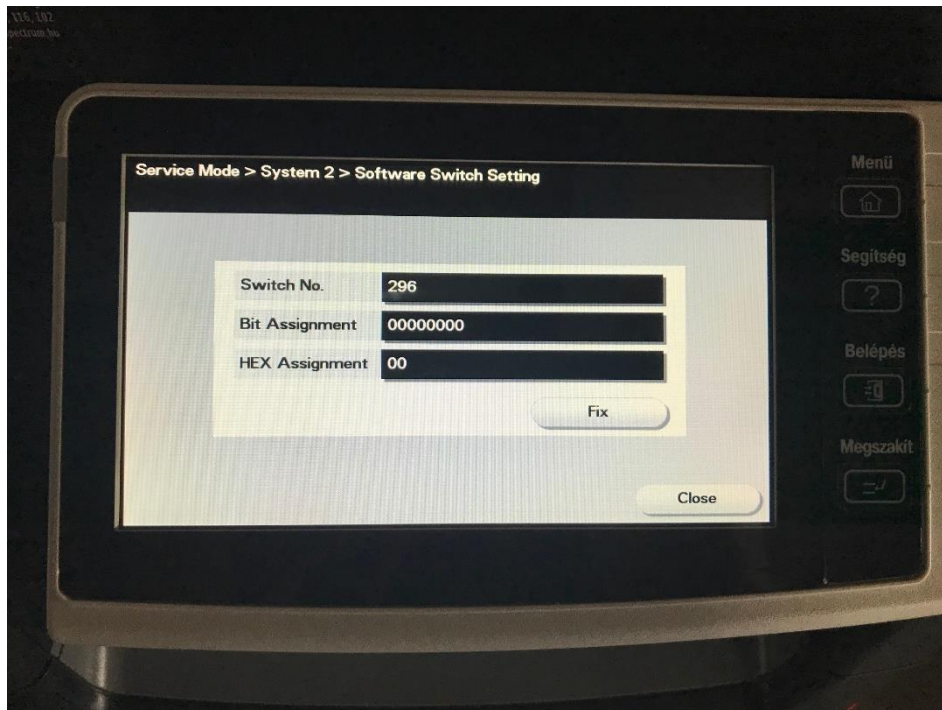

Írjuk át a HEX Assignment számot 08-ra, majd nyomjuk meg a Fix gombot a mentéshez. Ezt követően lépünk ki a szerviz módból, majd indítsuk újra a gépet. A Dip SW beállítása után már biztosan elérhető lesz az Encryption Key Type beállítás az eszköz honlapján.

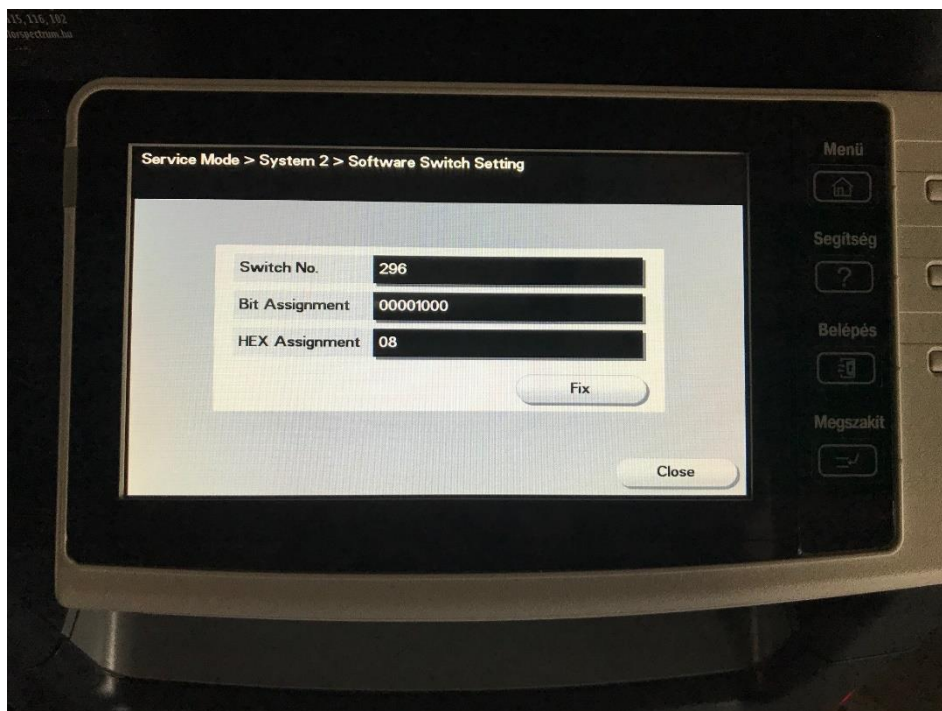

Miután beállítottuk, és elmentettük a tanúsítvány beállításokat, lépünk át az SSL Setting menüpontba és kapcsoljuk be a Mode using SSL/TLS pontot az alábbiak szerint Admin. Mode and User Mode.

The screenshot displays the Konica Minolta Web Connection interface. At the top, the header includes the Konica Minolta logo, the text 'Web Connection', and the model name 'bizhub 227'. The user is logged in as 'Administrator' with a 'Logout' button and a help icon. Below the header, there are several status indicators: 'Ready to Scan' and 'Ready to Print'. A navigation bar contains buttons for 'Maintenance', 'System Settings', 'Security' (which is highlighted), 'User Auth/Account Track', 'Network', and 'Box'. Below this, there are more buttons: 'Print Setting', 'Store Address', 'Wizard', 'Customize', and 'To Main Menu'. The main content area is divided into two sections. On the left, under 'PKI Settings', there is a list of options: 'Device Certificate Setting', 'SSL Setting' (which is selected), 'Protocol Setting', 'External Certificate Setting', 'Certificate Verification Settings', 'Address Reference Setting', 'Restrict User Access', 'Auto Logout', 'Administrator Password Setting', 'TX Operation Log Setting', and 'Quick Security Setting'. On the right, the 'SSL Setting' configuration is shown. It includes a dropdown menu for 'Mode using SSL/TLS' set to 'Admin. Mode and User Mode', and a dropdown for 'Encryption Strength' set to 'AES-256, 3DES-168, RC4-128'. Below these, there is a section for 'SSL/TLS Version Setting' with four checkboxes: 'SSLv3', 'TLSv1.0', 'TLSv1.1', and 'TLSv1.2', all of which are checked. At the bottom right of the configuration area, there are 'OK' and 'Cancel' buttons.

A beállítás végeztével lépünk ki.



COLORSPECTRUM KFT

1131 Budapest, Dolmány u. 26.

Tel.: +36 1 303-9009

Fax: +36 1 210-1482

E-mail: info@printmonitoring.com

www.printmonitoring.com